



# MODEL: AVR-XD

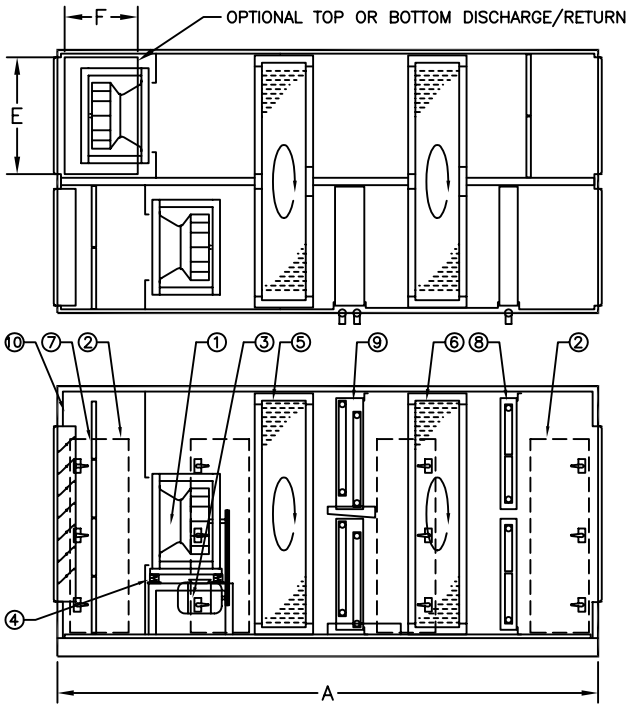

- ① HEAVY DUTY BLOWERS
- ② ACCESS DOOR WITH CAM-LOK LATCHES
- ③ NEMA ODP MOTORS
- ④ VIBRATION ISOLATORS
- ⑤ HYGROSCOPIC ROTARY HEAT EXCHANGER
- ⑥ SENSIBLE ROTARY HEAT EXCHANGER
- ⑦ 2" 30/30 TYPE PLEATED FILTERS (OA/RA)

**OPTIONS**


- ⑧ HOT WATER OR STEAM COIL
- ⑨ CHILLED WATER OR DX COIL
- ⑩ SHUT-OFF DAMPER

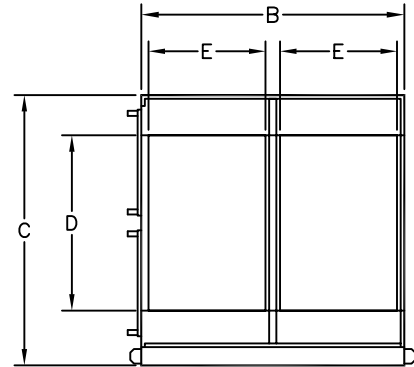

MODEL #	DIMENSIONS						BLOWER SIZE	MOTOR HP(ea.)*	EST. WEIGHT	NOMINAL CFM	NOMINAL EFF
	A	B	C	D	E	F					
AVR-850XD	108.00	56.00	40.00	30.00	21.00	20.00	10" FC	2 HP	2500	1700	75%
AVR-1100XD	144.00	62.00	54.00	40.00	24.00	24.00	12" PF	7.5 HP	3500	3300	75%
AVR-1300XD	144.00	74.00	64.00	44.00	26.00	28.00	13" PF	7.5 HP	4500	4000	75%
AVR-1600XD	162.00	84.00	74.00	48.00	32.00	30.00	16" PF	10 HP	5500	6000	75%
AVR-1750XD	162.00	92.00	80.00	52.00	32.00	34.00	20" PF	15 HP	7000	8000	75%
AVR-1900XD	162.00	98.00	90.00	56.00	36.00	36.00	20" PF	15 HP	7000	8000	75%
AVR-2250XD	192.00	112.00	100.00	72.00	46.00	44.00	27" PF	20 HP	9500	13,000	75%
AVR-2500XD	210.00	124.00	112.00	84.00	48.00	44.00	30" PF	25 HP	11,000	17,000	75%
AVR-2750XD	240.00	132.00	122.00	96.00	56.00	48.00	36" PF	30 HP	12,500	20,000	75%

\* MOTOR HP IS BASED ON NOMINAL CFM AND MAY NOT BE SUFFICIENT FOR MAX CFM RATINGS OR HIGH E.S.P.

EST. WEIGHT DOES NOT INCLUDE OPTIONS. SPECIFICATIONS AND DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.

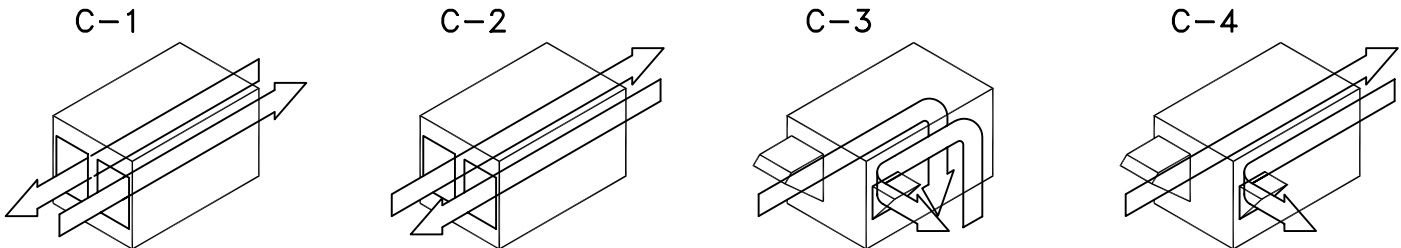

AIR FLOW CONFIGURATIONS

